

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Built-in strain relief,ideal for automated placement
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 260°C/10 seconds at terminals

- Case : Molded plastic body
- Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
- Polarity : Polarity symbol marking on body
- Mounting Position : Any
- Wa

YFW SSL1040

YFW SSL1045


YFW SSL1050

YFW SSL1060


YFW SSL1080

YFW SSL10100

0
20
40
60
80
100

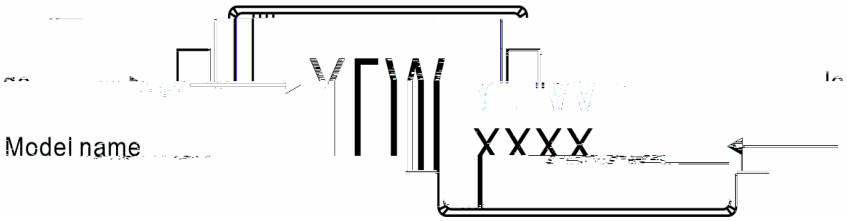

	Tape/Reel,13”reel	3000PCS/Reel 30000PCS/Carton

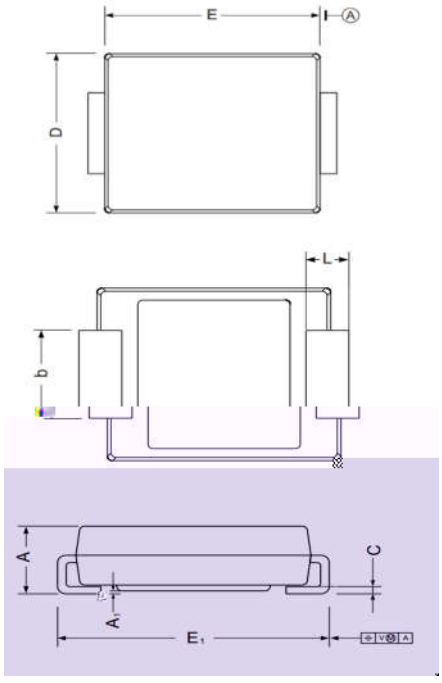

A	2.00	2.62	79	103
E	6.5	7.0	256	276
D	5.6	6.2	220	244
E_1	7.6	8.0	299	315
A1	0.05	0.21	2.0	8.3
C	0.15	0.31	5.9	12
L	0.9	1.6	35	63
b	2.75	3.25	108	128

