Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

FEATURES

For surface mounted applications





YFW RS1A

YFW RS1B

YFW RS1D

YFW RS1G

YFW RS1J

YFW RS1K

YFW RS1M

Fig.1 Forward Current Derating Curve

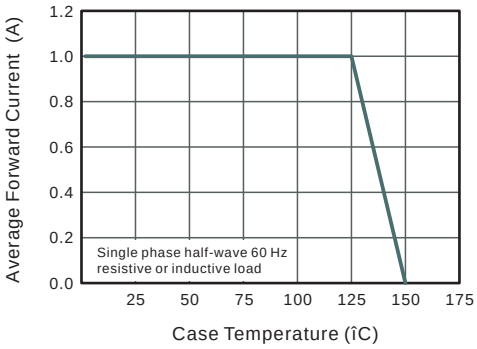


Fig.2 Typical Reverse Characteristics

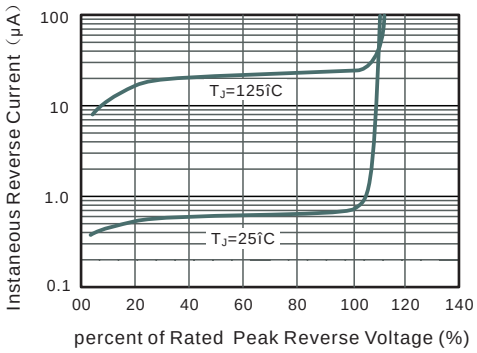


Fig.3 Typical Instaneous Forward Characteristics

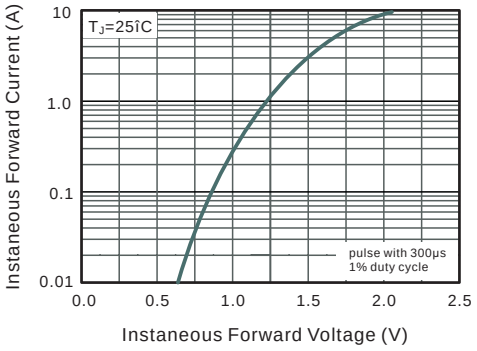


Fig.4 Typical Junction Capacitance

