**YFW R5AB**

**YFW R5BB**

**YFW R5DB**

**YFW R5GB**

**YFW R5JB**

**YFW R5KB**

**YFW R5MB**

Fig.3 Typical Instaneous Forward Characteristics

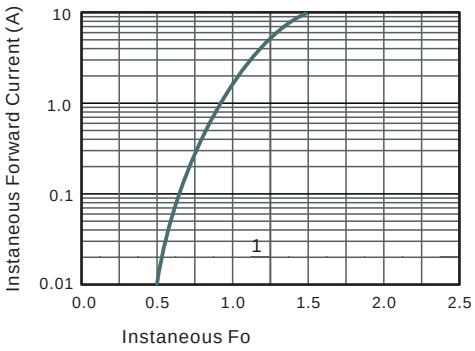

## Marking Diagram

## Ordering information

| Package | Packing Description | Packing Quantity |
|---|---|---|
| **SMBF** | Tape/Reel,13”reel | 5000PCS/Reel 50000PCS/Carton |

## Package Dimensions

**SMBF**

| Dim. | Millimeter(mm) | | mil | |
|---|---|---|---|---|
| | Min. | Max. | Min. | Max. |
| A | 1.1 | 1.3 | 43 | 51 |
| C | 0.18 | 0.26 | 7 | 10 |
| D | 4.2 | 4.4 | 165 | 173 |
| E | 3.5 | 3.7 | 138 | 146 |
| $H_E$ | 5.1 | 5.5 | 200 | 216 |

200

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics