Fast Recovery Surface Mounted Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 5.0 A

FEATURES

- The p l ㄅ l e

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

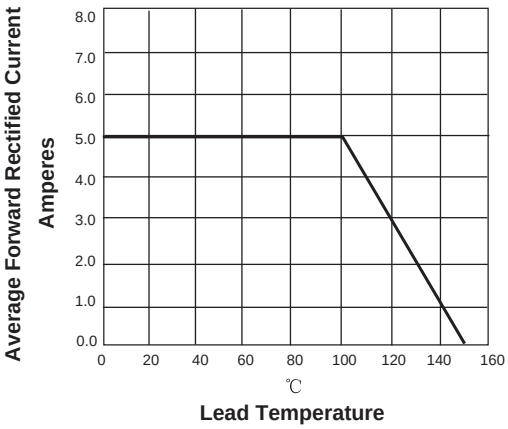

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

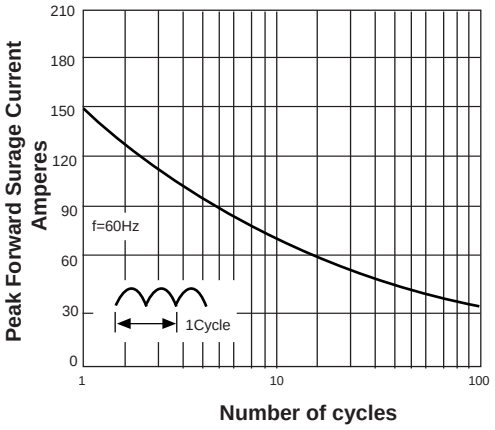

FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

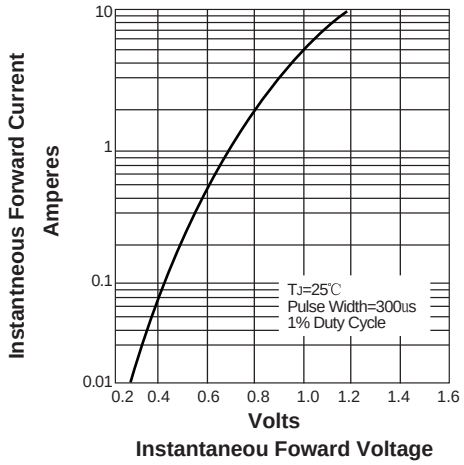

FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

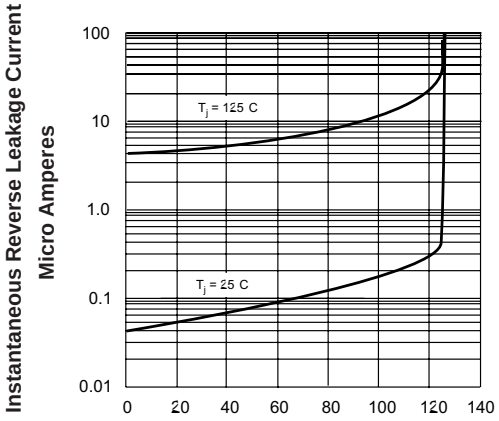

!"#$% &# %! '

(!) * !#$% #$+ , ! ' -#, $

. /" %*	. /"#$% &*0/!#1-#, $	.	
5 (6788	Tape/Reel,13”reel	5000PCS/	rton

. /" %* &# ' *$0#, $0

5 (6788

	&# ' 9	#::# ' *	' #:
		#$9	#$9
	A	1.1	43

Disclaimer