
4
3
1
2
YFW
MB4XX

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

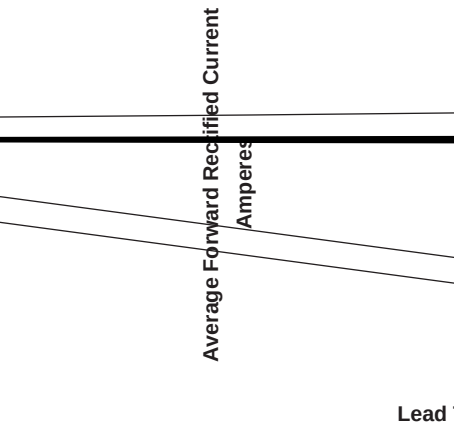


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

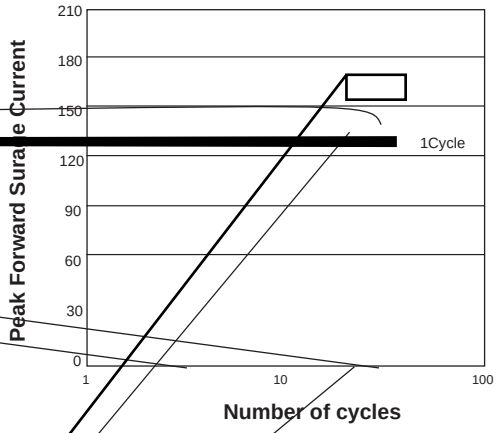


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



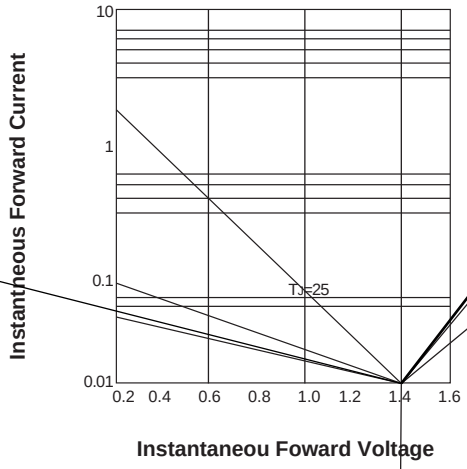


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

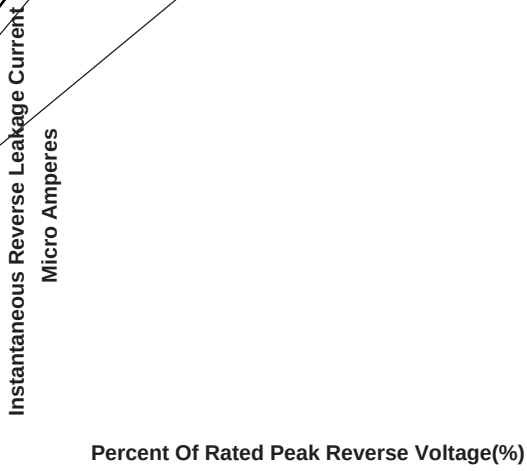

Marking Diagram

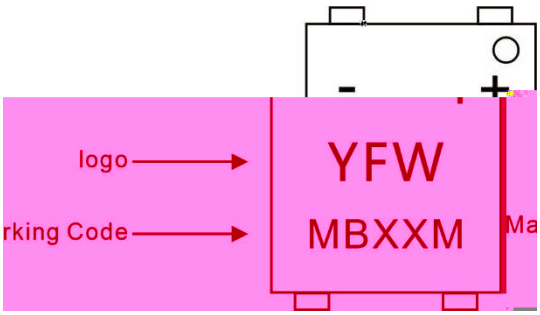


Ordering information

Package	Packing Description	Packing Quantity
UMSB		


Package Dimensions

UMSB

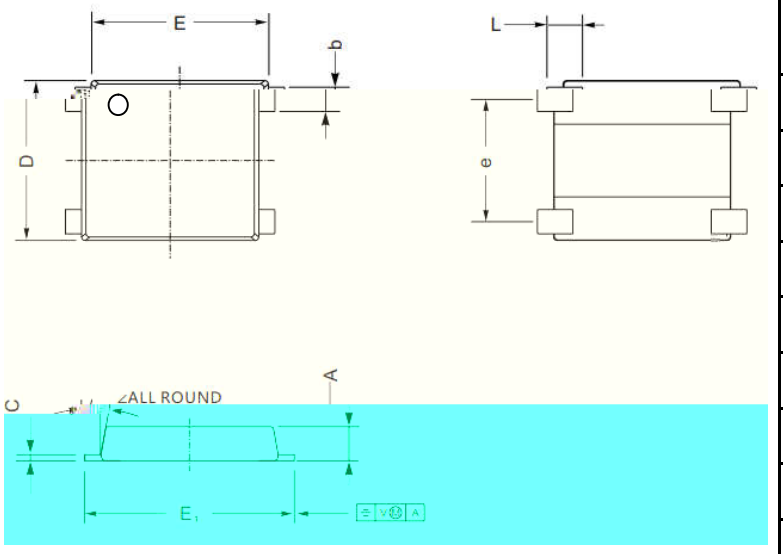

Dim.	Millimeter(mm)		(mil)	
	Min.	Max.	Min.	Max.
∠				

The recommended mounting pad size

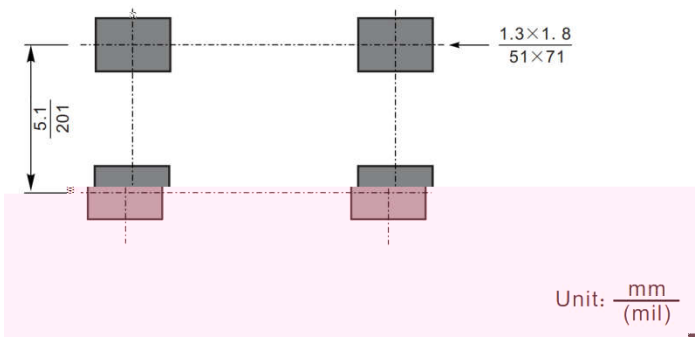

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics