1 Channel Ultra-low Capacitance ESD Protection

Features

-
-
-
-
-

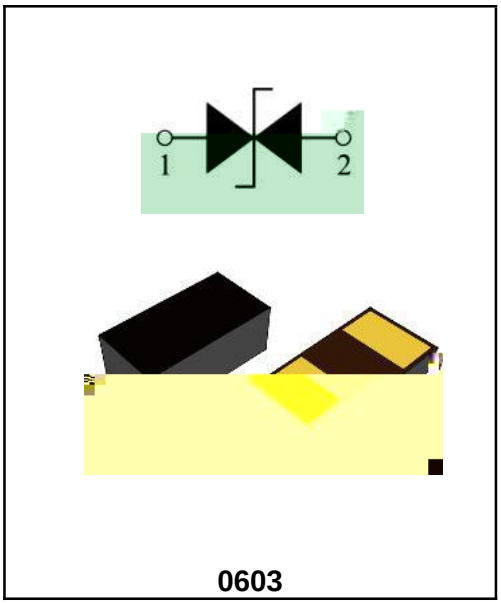

Application

-
-
-
-

Order Information

Part Number	Package	Size (mm)	Delivery Form	Delivery Quantity

Limiting Values(T_A = 25 °C, unless otherwise specified)

Symbol	Parameter	Conditions	Min	Max	Unit
V_{ESD}		H			


50
-50

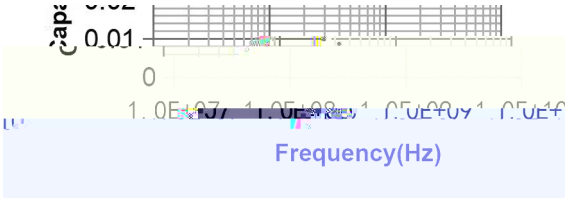
0.01
0
Frequency(Hz)





ESD Protection for Signal Line

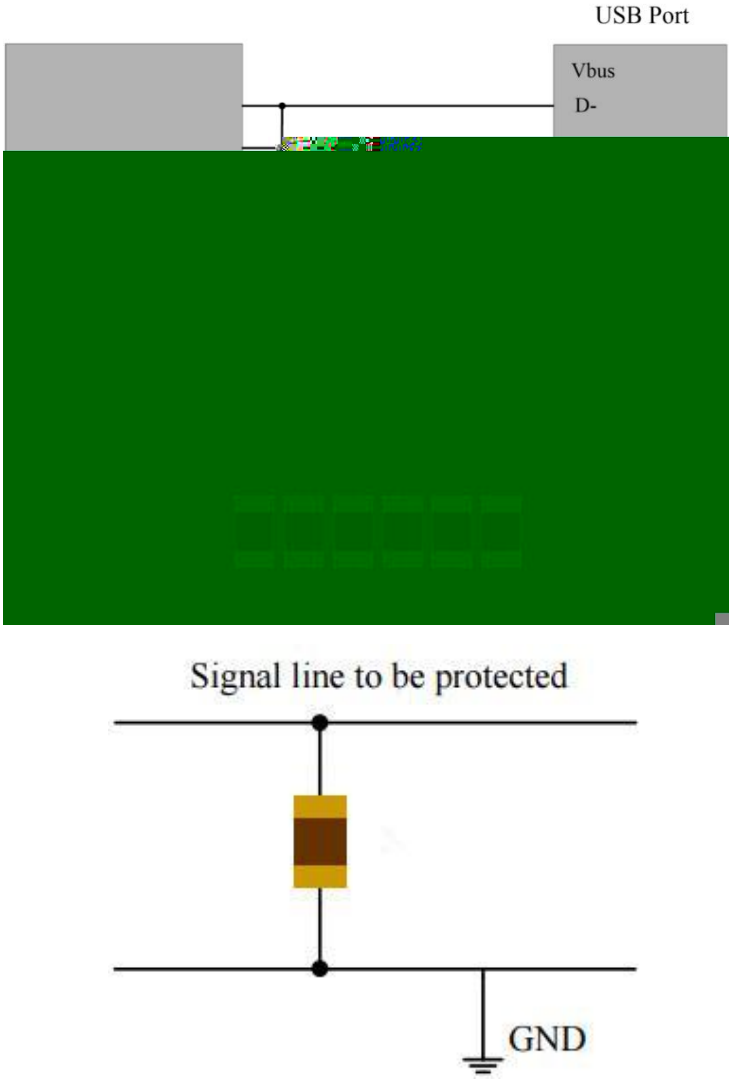

Package Dimension

