
Trench MOS Barrier Schottky Rectifier

Reverse Voltage - 50 V

Forward Current - 15 A

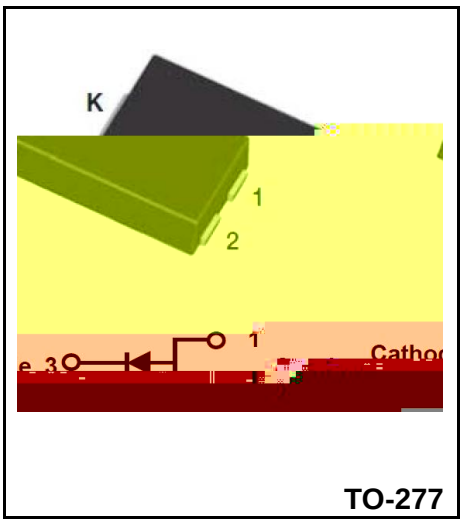

FEATURES

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA


- Case: TO-277
- Terminals: Solderable per MIL-STD-750, Method 2026

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Parameter

40

RATINGS AND CHARACTERISTIC CURVES

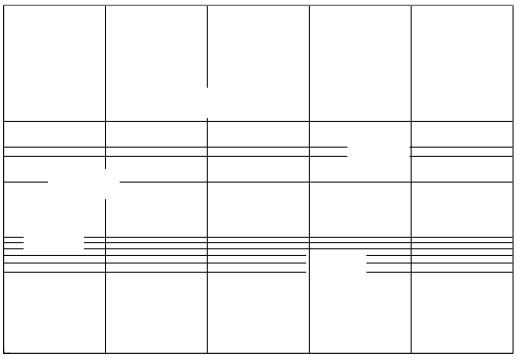

!"#$% &# %! '

(!) * !#$% #$+ , ! ' -#, $

. /" %*	. /"#$% &*0/!#1-#, $	. /"#$% 23 $-#-4
5 (6788 T		