

- Case: SOT-89
- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 3
- High temperature soldering guaranteed 260 /10seconds at terminals

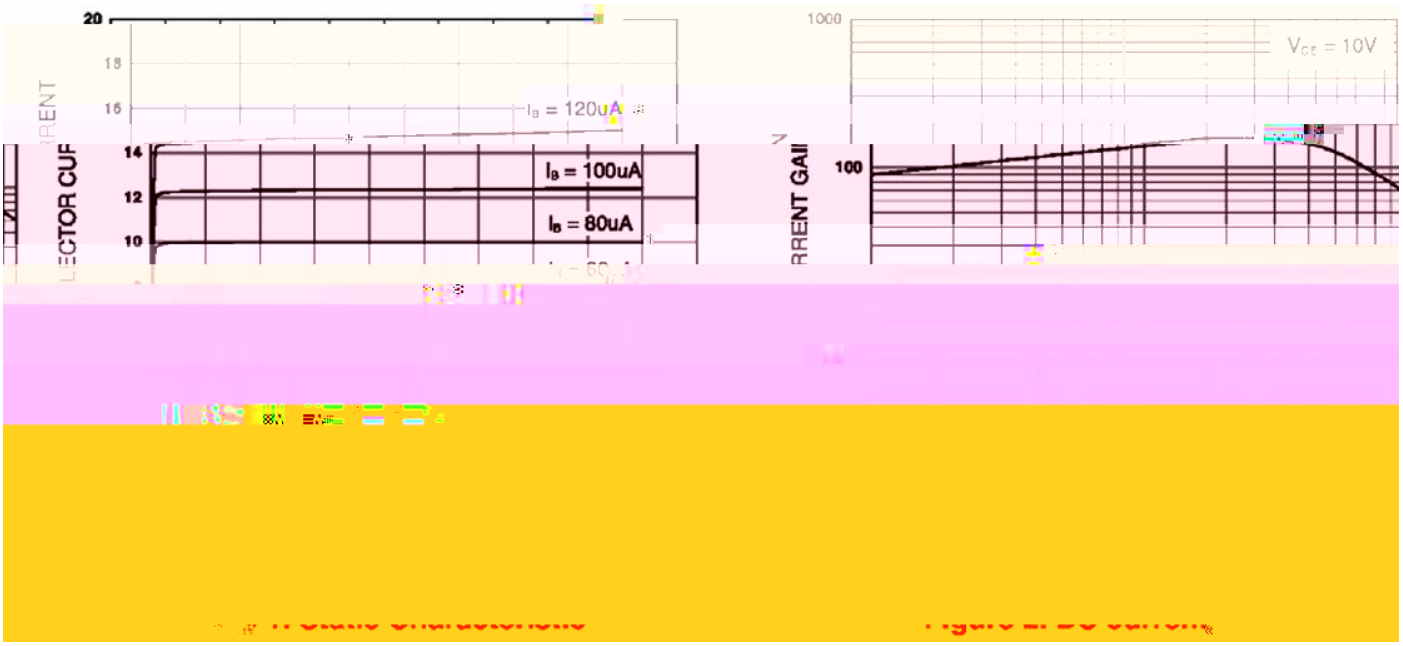

SOT-89



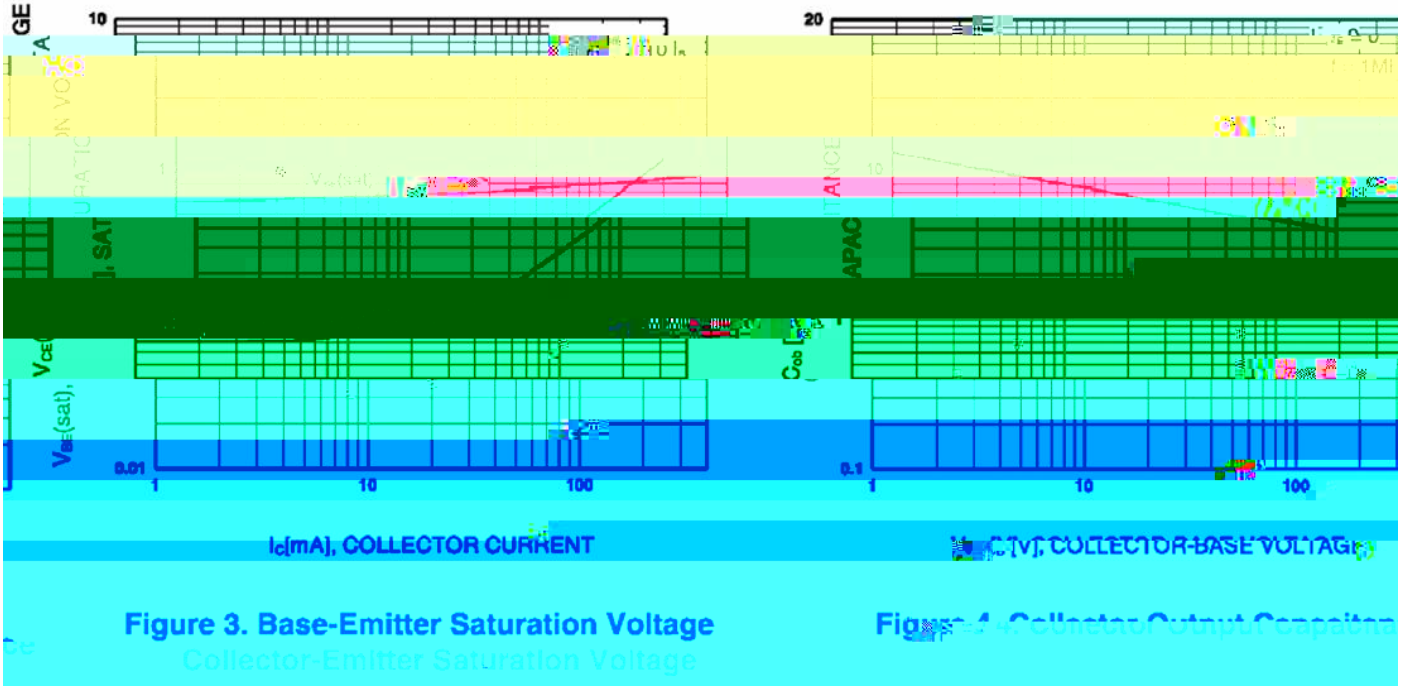


Figure 3. Base-Emitter Saturation Voltage

Figure 4. Collector Output Capacitance

