8.0A Single-Phase GLass Passivated Bridge Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 8.0 A

FEATURES

-
-
-
-
-

MECHANICAL DATA

-
-
-
-
-

Maximum Ratings & Thermal Characteristics

Rating and Characteristic Curves

FIG.2-MAXIMUM NON-REPETITIVE SUNRGE CURRENT

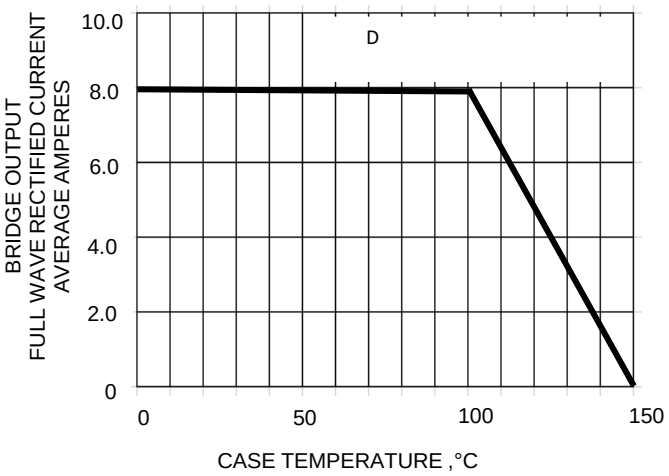

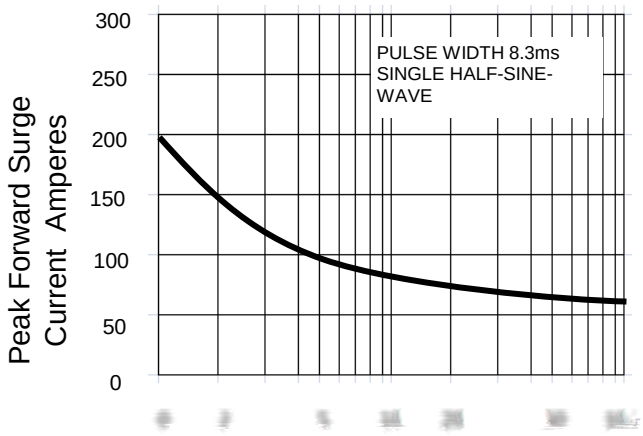

FIG.3-TYPICAL REVERSE CHARACTERISTICS

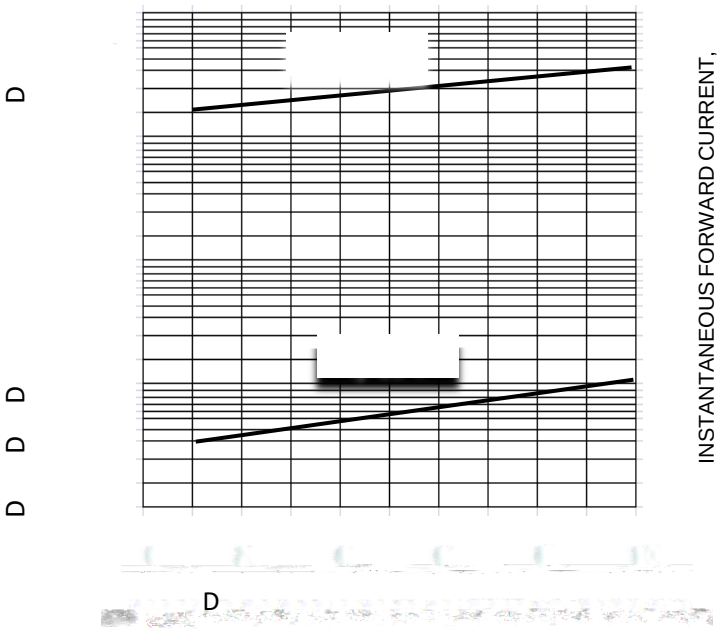

FIG.4-TYPICAL FORWARD CHARACTERISTICS

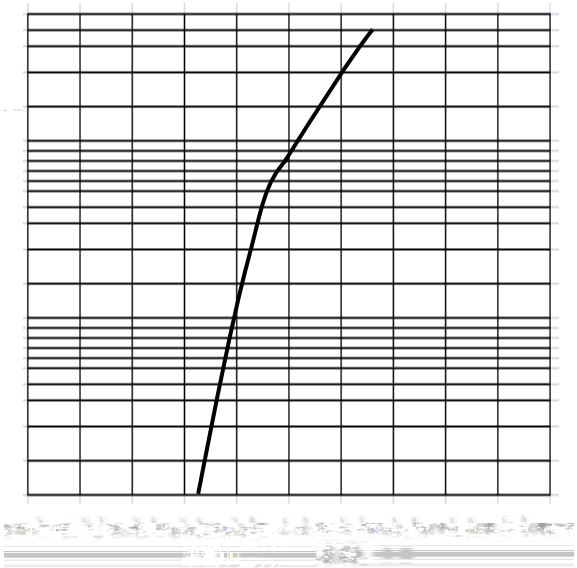

	Tape/Reel,13”reel	2500PCS/Reel 25000PCS/Carton

