Glass Passivated Standard Rectifiers

The plastic package carries Underwriters
Laboratory Flammability Classification 94V-0
Glass passivated junction chip
Low reverse leakage
High forward surge current capability
High temperature soldering guaranteed
260 /10 seconds at termis

Case : Molded plastic body
Terminals : S s ٻ ή

ERATING CURVE OUTPUT RECTIFIED CURRENT

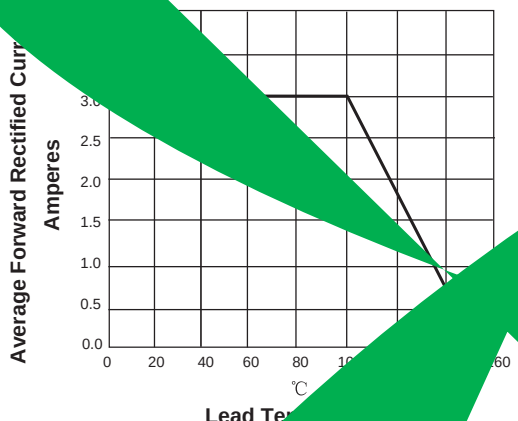

LAK FORWARD
PERLEG

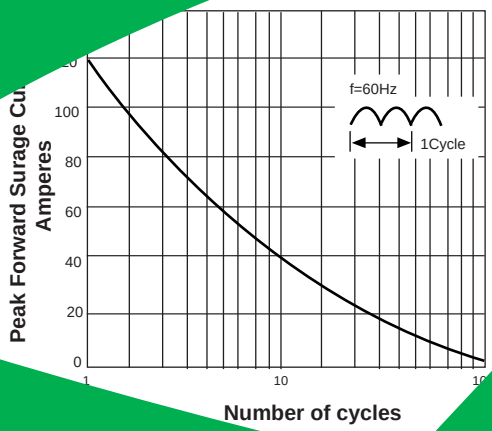

FIG. 3-TYPICAL RACTERISTICS

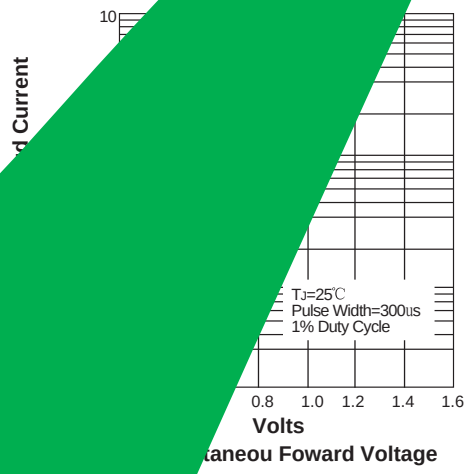

CHARACTERISTICS

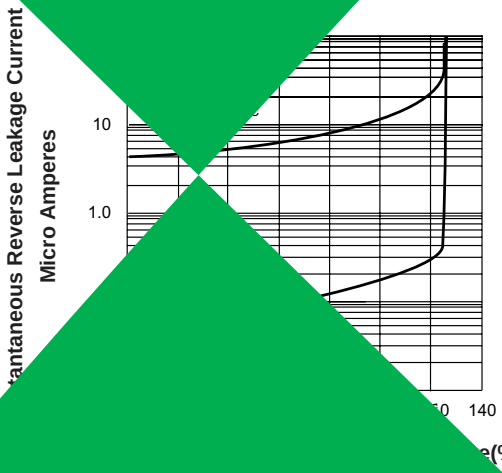

Ordering information

Package	Packing Description	Packing Quantity
DO-15	bulk	500PCS/Inner Box 30000PCS/Carton
	ammo pack	3000PCS/Inner Box 30000PCS/Carton

Package Dimensions

DO-15

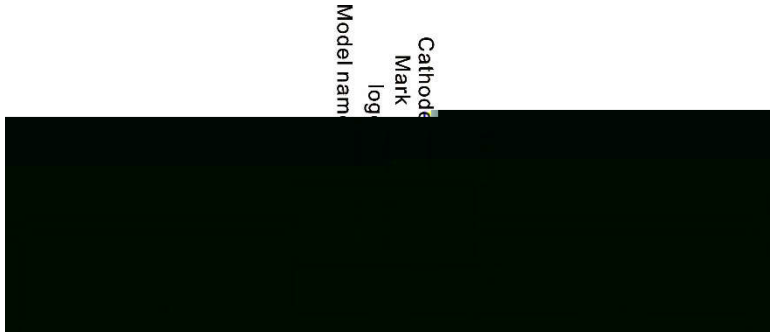

Dim.	Millimeter(mm)		INCHES	
	Min.	Max.	Min.	Max.
A	5.80	7.60	0.230	0.300
B	2.60	3.60	0.104	0.140
C	0.71	0.86	0.028	0.034
D	25.4	-	1.00	-