Standard Silicon Rectifiers

Reverse Voltage - 100 to 1000 V
Forward Current – 2.5 A

FEATURES

- For surface mounted applications
- Low profile package
- Open Junction chip
- High forward surge current capability
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: DO-15
- Terminals: Solderable per MIL-STD-750,

FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS


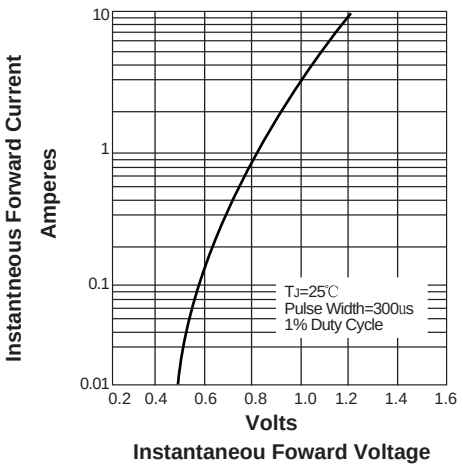


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

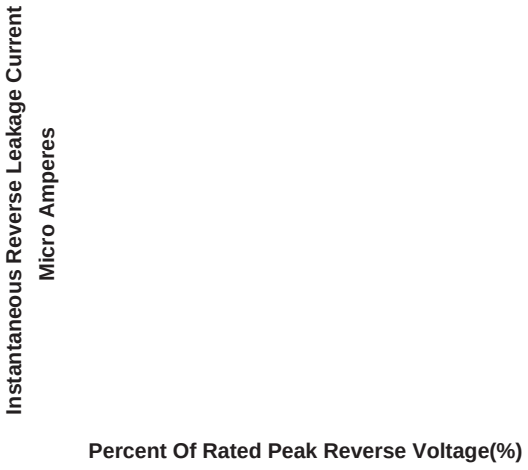

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed