SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 60 V

Forward Current - 60 A

FEATURES

- Low forward voltage
- High current capability
- High forward surge capability
- Low power losses High efficiency
- Guarding for over voltage protection
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: TO-247/PT TO-247/PTS
- Solder bath temperature275 maximum,10s per JESD22-106

Primary Characteristic

42

Marking Diagram

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
PT	TO-247	0.209oz(5.93g)	30pcs/tube	600PCS/Box 2400PCS/Carton

Package Dimensions

TO-247

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
A	4.90	5.10	0.193	0.201
A1	1.90	2.10	0.075	0.083
A2	2.29	2.54	0.090	0.100
b	1.00	1.40	0.039	0.055
b1	2.00	2.20	0.079	0.087
b2	3.00	3.20	0.118	0.126
c	0.50	0.70	0.020	0.028
D	15.75	16.05	0.620	0.632
E	20.20	20.80	0.795	0.819
e	5.45 (BSC)		0.215 (BSC)	
e1	10.90 (BSC)		0.429 (BSC)	
F	6.05	6.25	0.238	0.246

Marking Diagram

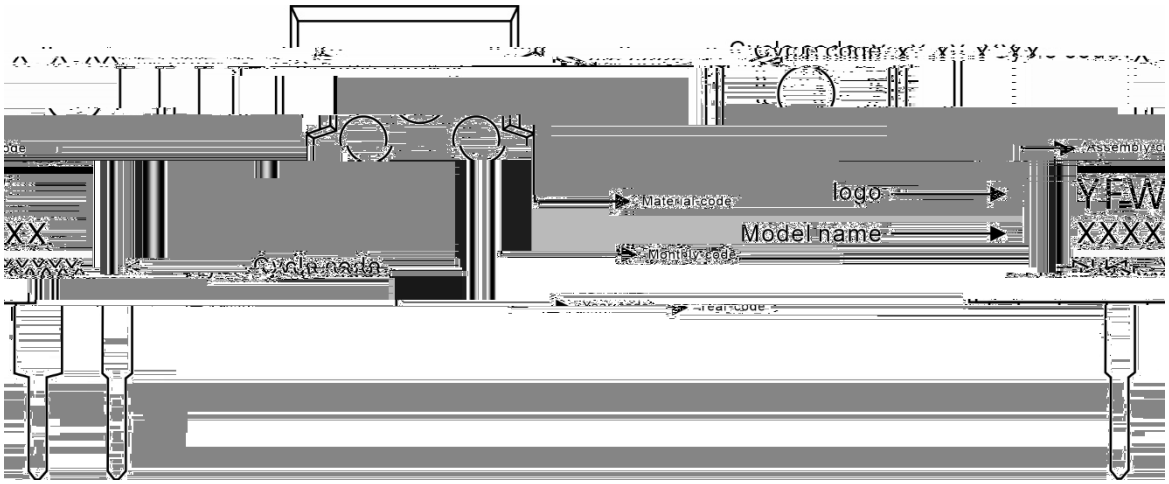

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
MBR6060PTS	-			

Package Dimensions

TO-247S

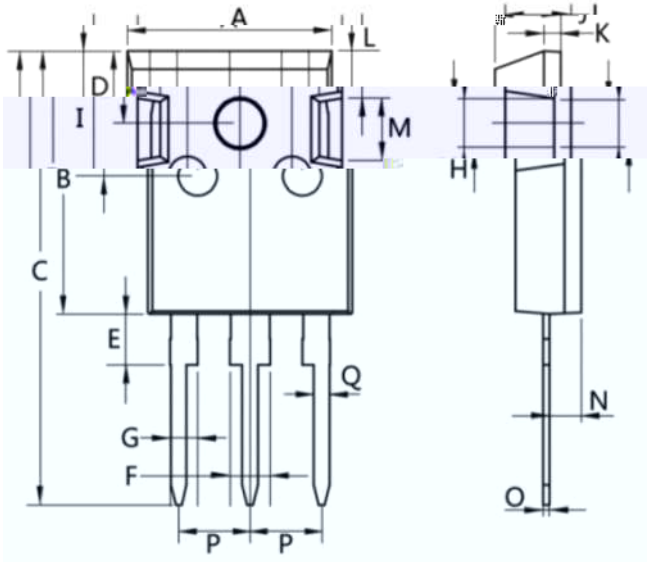

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
			-	
	-		-	
	-			-
	-			
			-	

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used