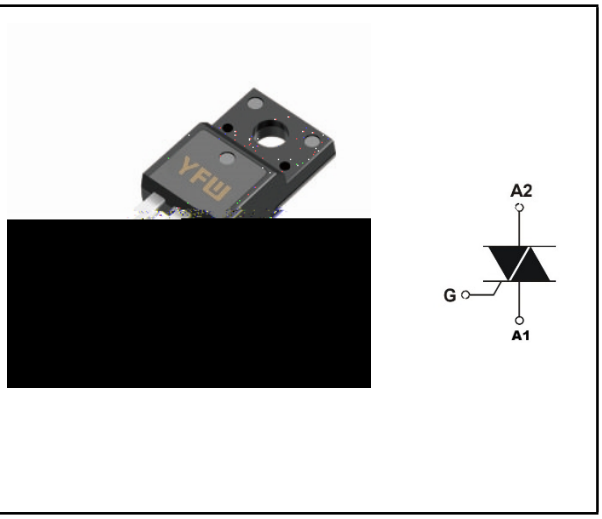



TJ6$ $6R60/FT15 80 Tf 1 i 847.265 2.4264 803/-6 50.391680 Tf 1 i -9753.58 -345.84TD[(-4127.40.797& 0 TD[(R)]TJ 100.79D[(H)]TJ 98.3911 0
0 TD[(N)]TJ 1 i 132 0 TD[(D)]TJ 100.794.044 0 TD[05 TDTJ 91.1887 0 TD[(H)]TJ 100.797 0 TD[(Q)]TJ 1 i 144 0 TD[(Q)]TJ 108.007 0 TD[(U)]TJ 60 0 TD[(V)0 TD[05Y



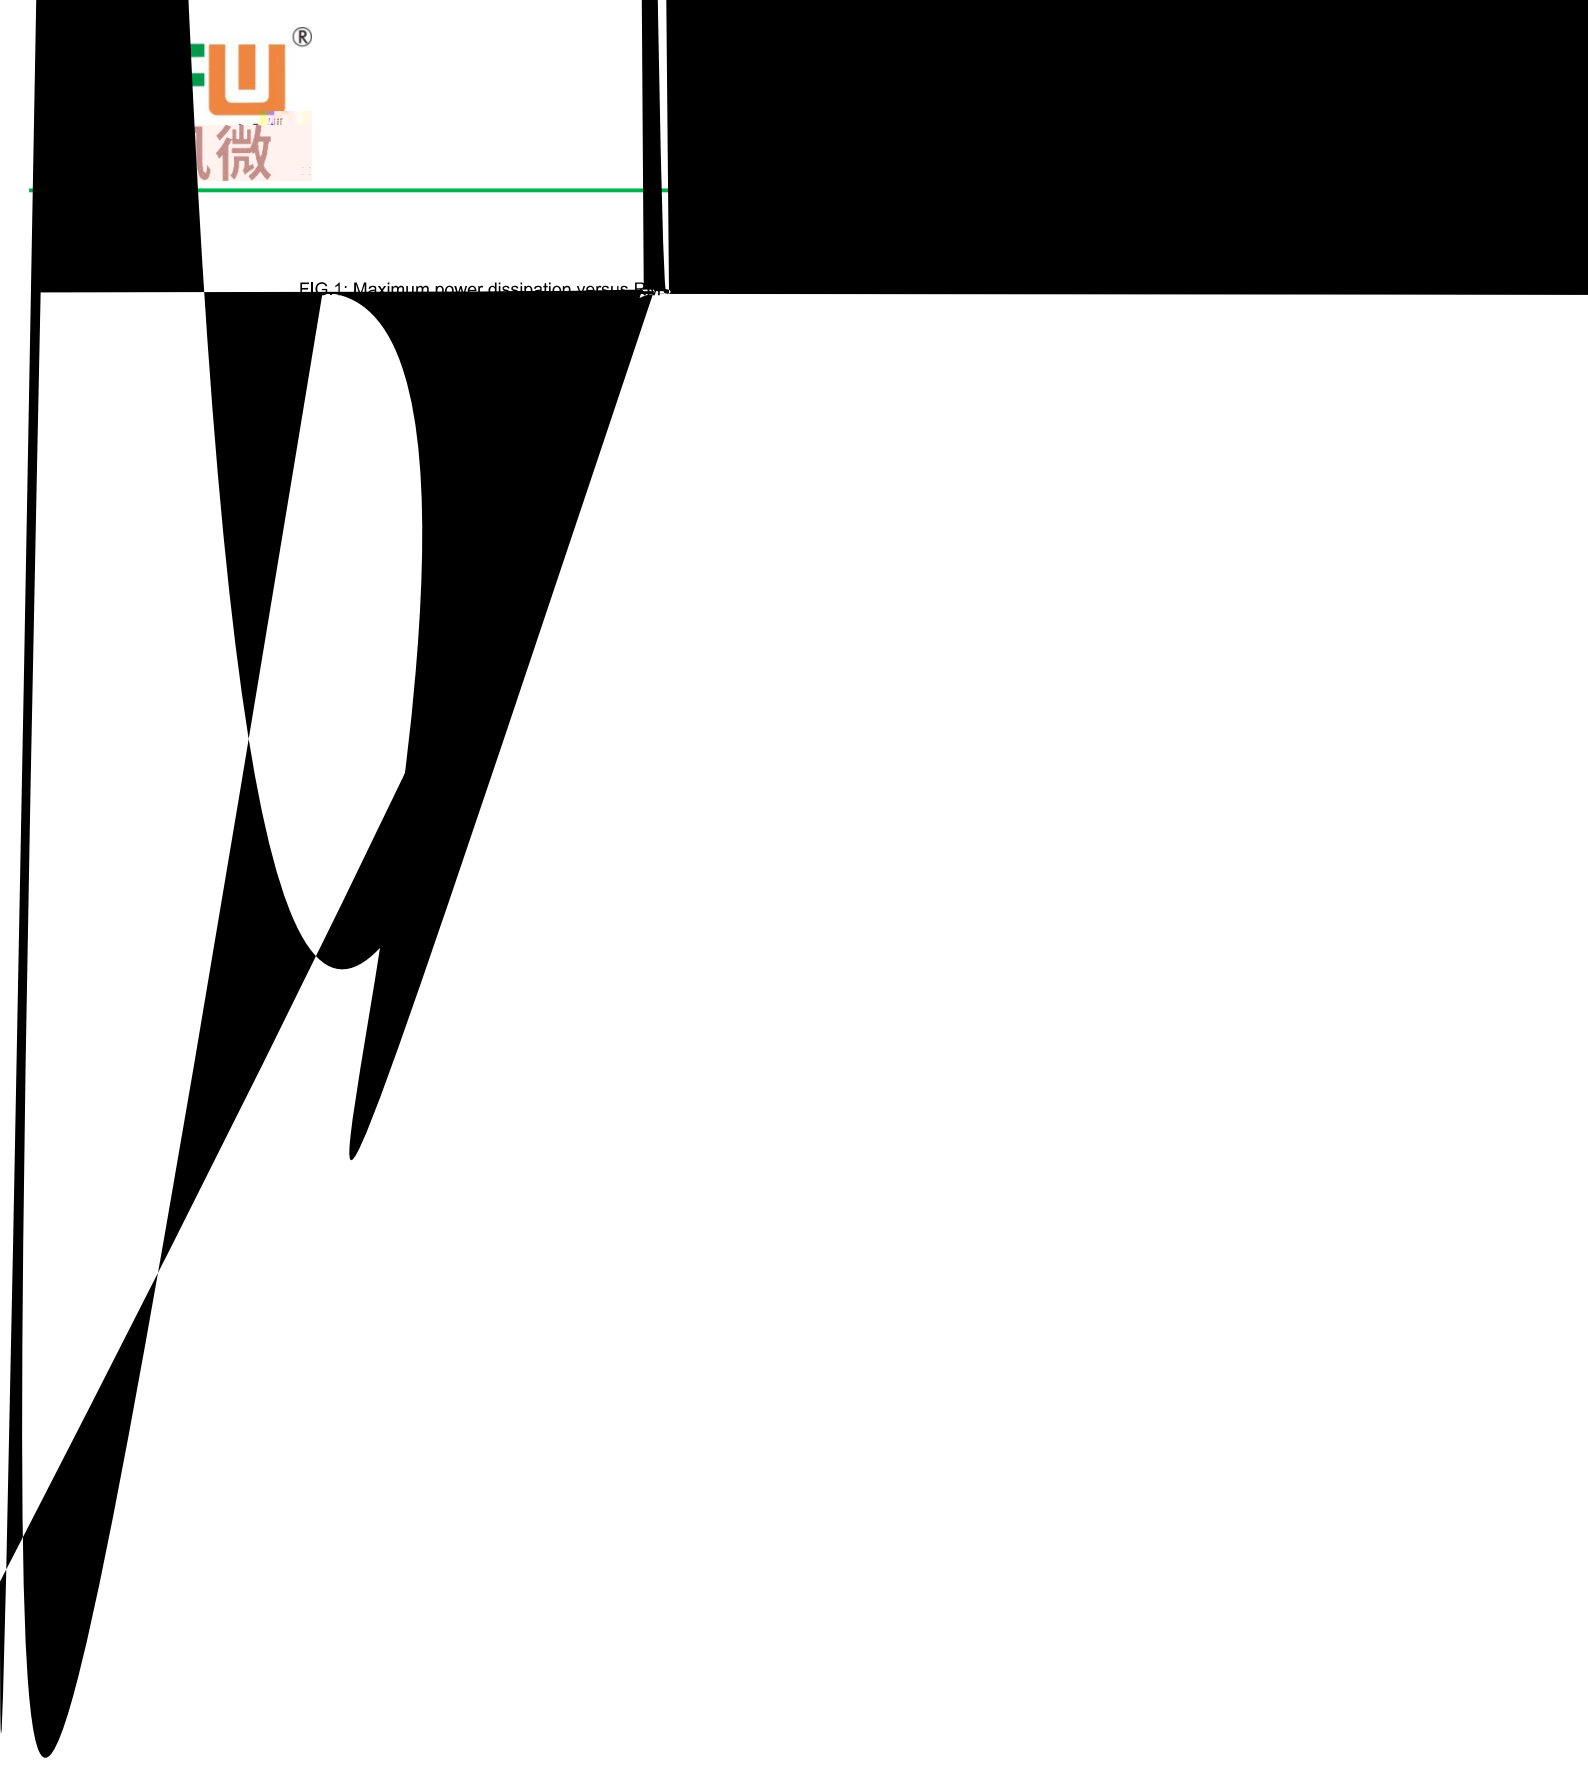


FIG.1: Maximum power dissipation versus Ex

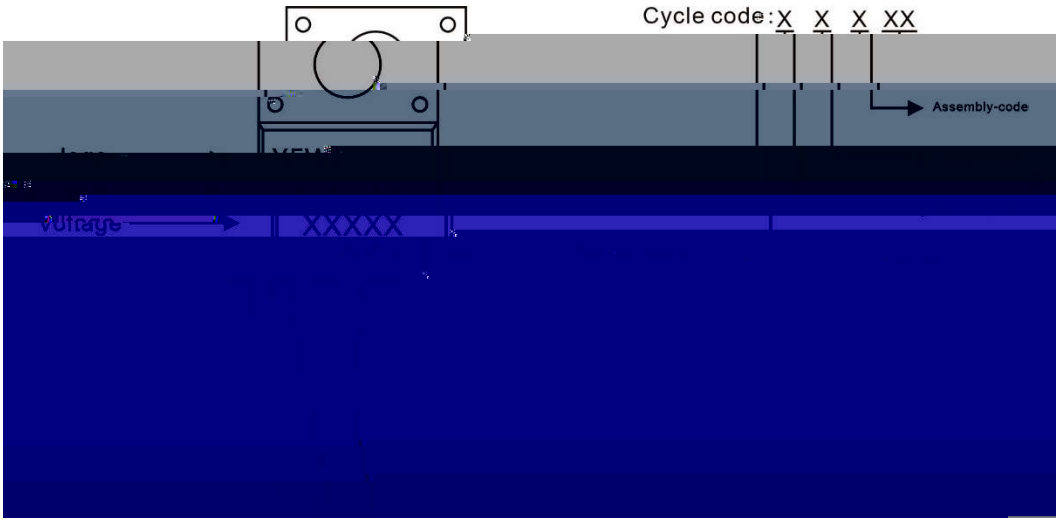

	TO-220F	0.06oz(1.74g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

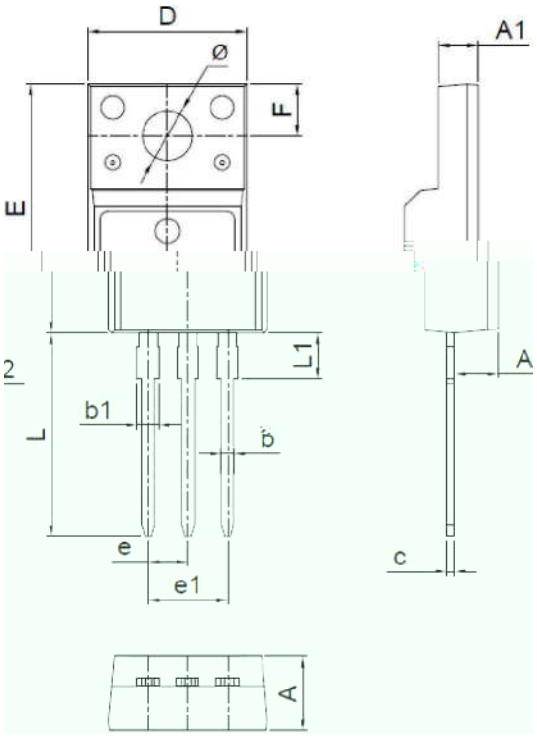

A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.66	2.86	0.105	0.113
b	0.75	0.85	0.030	0.033
b1	1.24	1.44	0.049	0.057
c	0.40	0.60	0.016	0.024
D	10.00	10.32	0.394	0.406
E	15.75	16.05	0.620	0.632
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	3.10	3.5	0.122	0.138
L	13.50	13.90	0.531	0.547
L1	2.90	3.30	0.114	0.130
Φ	3.10	3.30	0.122	0.130

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger humar Ṅ S я א