Thyristor Surge Suppressors

Reverse Voltage 6.0 ~ 390 V

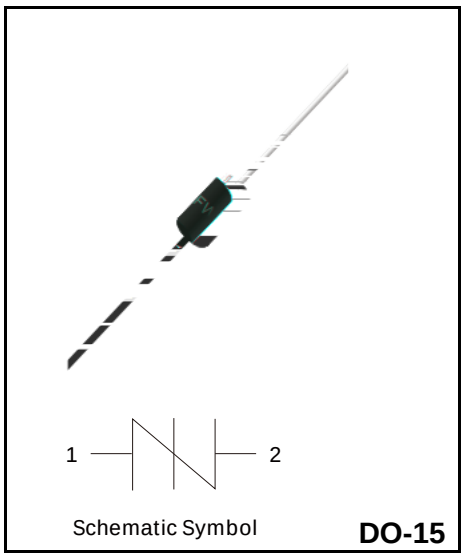

Features

-
-
-
-
-
-
-
-
-

MECHANICAL DATA

-
-
-
-

Electrical Parameters

Parameter	Definition
V_{DRM}	
V_S	
V_T	
I_{DRM}	
I_S	
I_T	
I_H	
C_O	
V_{PP}	
I_{PP}	

Electrical Characteristics

V

Part Number	Marking	V_{DRM} (V)	V_S (V)	V_T (V)	I_{DRM} (uA)	I_S (mA)	I_T (A)	I_H (mA)	C_O (pF)

a

Characteristics Curves

F

Ordering information

Package	Packing Description	Packing Quantity
DO-15	bulk	500PCS/Inner Box 30000PCS/Carton
	ammo pack	3000PCS/Inner Box 30000PCS/Carton

Package Dimensions

DO-15

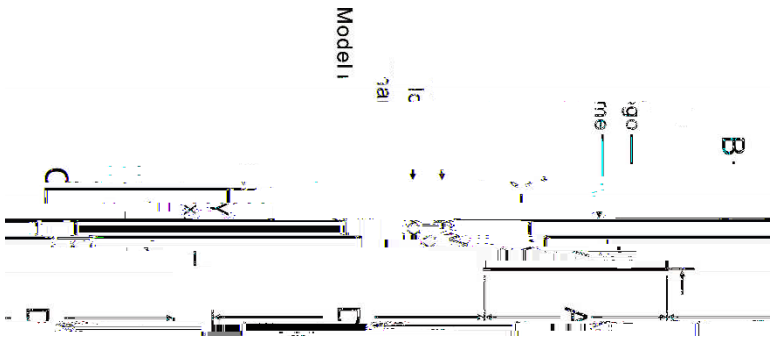

Dim.	Millimeter(mm)		INCHES	
	Min.	Max.	Min.	Max.
A	5.80	7.60	0.230	0.300
B	2.60	3.60	0.104	0.140
C	0.71	0.86	0.028	0.034
D	25.4	-	1.00	-

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of rk א ס eliaw я fN d א d