Surface Mount Glass Passivated Standard Rectifier

Reverse Voltage - 700 V

Forward Current - 100mA

FEATURES

- For surface mounted applications
- Low profile package
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives
- Applicated in LED lighting

MECH

Fig.

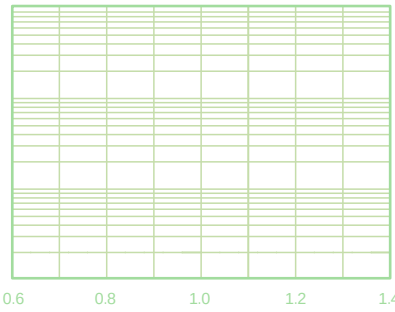

Ordering information

Package	Packiki	ㄅ	ki	f ±	ㄊ	k