- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Open Junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 250°C/10 seconds at terminals

- Case: R-6
- Terminals: Solderable

RAWARDINGERURG. 4-TYVE OUTPUT RECTIFIEDERURRENT RACTERISTICS20 Tm 088(482 AverRevenstantneRectifiederse Leakage Curr21.-

FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

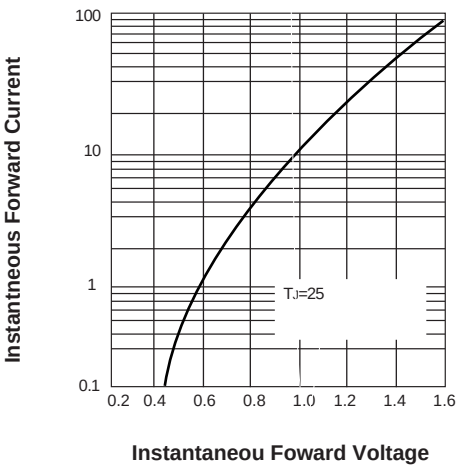

FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

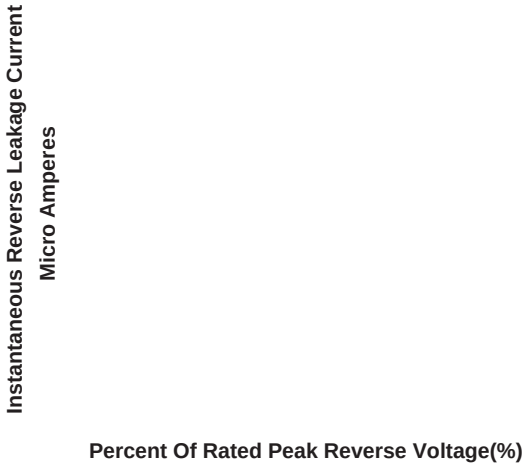

Ordering information

Package	Packing Description	Packing Quantity
R-6		

Package Dimensions

R-6

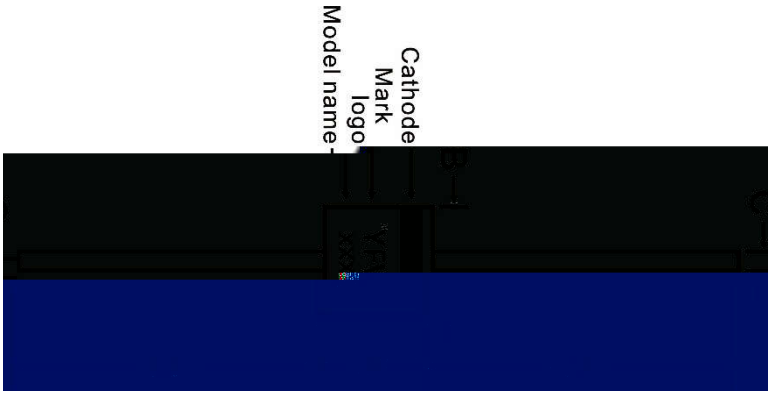

Dim.	Millimeter(mm)		INCHES	
	Min.	Max.	Min.	Max.