Ultra Fast Recovery Surface Mounted Rectifiers

Reverse Voltage - 1200V

Forward Current - 1.0 A

FEATURE

-
-
-
-
-
-

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unles

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

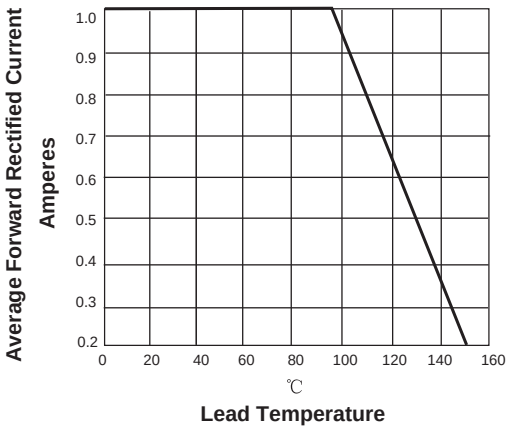

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

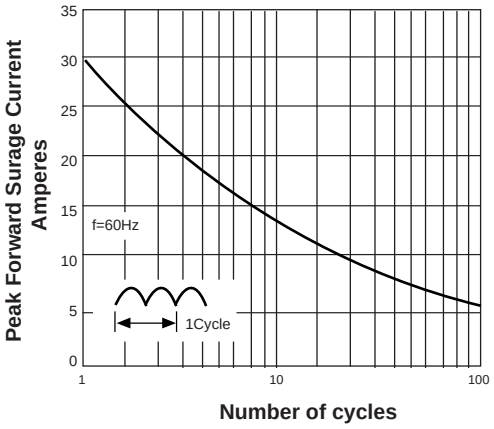

FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

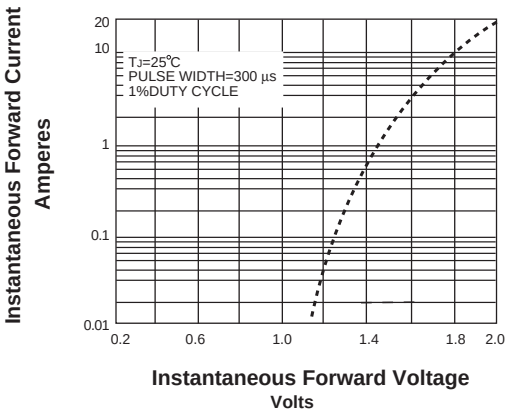

FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

